



公司名称: 北京信达共创机械设备有限公司

BENEFICIARY NAME: Beijing Xinda Creation Machinery Equipment Co.Ltd...

联系人 (Contact person): Aaron shang

手机 (Phone):(+86)(0)13911564503

邮箱(E-mail): aaron.shang@xindacreation.com

网址 (Website): www.xindacreation.com







COMPANY PROFILE

Nuosen heavy Machinery Co., Ltd, after focusing on hydraulic hammers for over 14 years, has become a leading company in the industry because of the variety and quality of its products, and its market share.

In 2004, Hangzhou Nuosen Machinery Co., Ltd was established, first appeared on the historical stage. The company moved to Jiangsu Binhai industrial park as Nuosen Heavy Machinery Co., Ltd in 2010. There it received greater attention from local government,

which placed emphasis on its development. In 2012, the international sales center integrated with elegant Qiantang river views and near the Xiaoshan International Airport and Hangzhou Railway station. In 2013, the company took over a famous factory, and began exporting products to the overseas market; Nuosen employs a group of high educated engineering technicians with abundant design experience. The company uses precise technology and constantly imports

advanced equipment, and has implemented advanced production technology and processes.

These have greatly improved production efficiency and serve to guarantee the high quality, high efficiency and durability of the products.

In 2017, a new production center and office building were completed. The production center covers 55000 square meters. Nuosen Machinery received an overall upgrade. The yearly producing reaches 15,000 units, the largest diameter of working tool is 210mm.

Nuosen has continued to win the approval of the ISO900 and CE quality management systems,

and is involved in the construction of key national and local projects. The products have been widely recognized by the industry and substantial cooperation has also been conducted with many excavator manufacturers in the OEM market. Besides, we are the exclusive dealer of Chicago Pneumatic(CP) in China in 2014.

Our products include "Hydraulic Pressure+Nitrogen Gas" breakers and spare parts for all the models.

Nuosen strives to enhance the management proficiency of the enterprise, owns 12 branches, more than 200 agents, 8 central warehouses, and its sales net services cover the globe. In America, Europe, Asia, the Middle East... Nuosen can be found everywhere in the world.



STRUCTURE AND FEATURES

Structure and Features

■ The key indexes of a hydraulic breaker is the hit frequency and hit energy. Each model of Rewin series is equipped with powerful hit system hydraulic & nitrogen, with high efficiency, low power loss, and maximum twice—hit energy, which provide great hit energy.

Hit Energy Improved Structure


■ The outstanding design longer the running distance of piston and main body, making the breaker a maximum matching rate with the mainframe.

Flow Adjustable Device

■ The device gives effective adjustment of the flow from the grab or power source, which enable the adjustments according to the hardness of rocks, high hit energy with low hit frequency, low hit energy with high hit frequency.

High-Quality Materials & Specially Precise Process

■ Special precise process ensures the sealing, great hit energy and outbreak force, with high–quality materials ensuring durability.

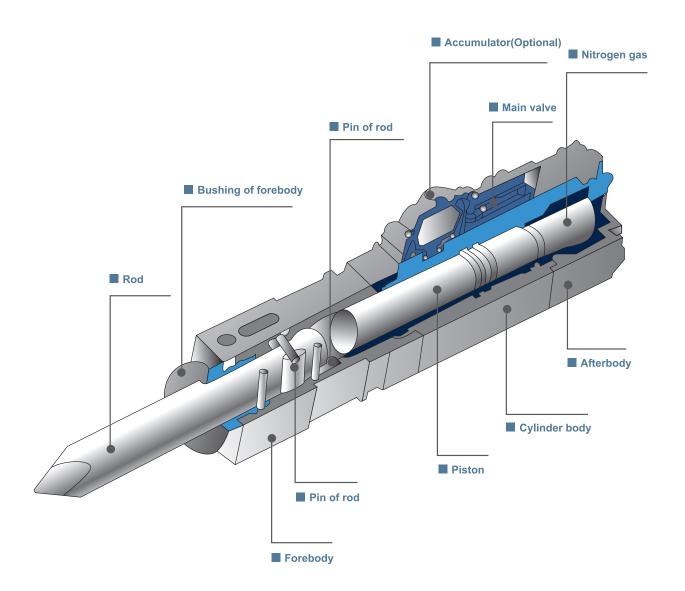




ltem		Unit	SMALL MODEL					
			RWB40	RWB45	RWB53	RWB68	RWB75	
Weight	Box type		185	186	190	276	465	
	Top type	Kg	155	160	170	271	390	
	Side type		195	196	190	326	435	
Impact Frequency		bpm	800~1400	700~1200	600~1100	500~900	400~800	
Operating Oil Pressure		bar	90~120	90~120	90~120	110~140	120~150	
Relief		bar	120~150	120~150	120~150	150~170	170~180	
Operating Flux		I/min	15~30	20~40	40~70	40~70	45~85	
Rod Diameter		mm	40	45	53	68	75	
Size of Tube		inch	1/2	1/2	1/2	1/2	1/2	
Applicable Excavator		ton	0.8~2.5	1.2~3.0	2.0~4.5	4.0~7.0	6.0~9.0	





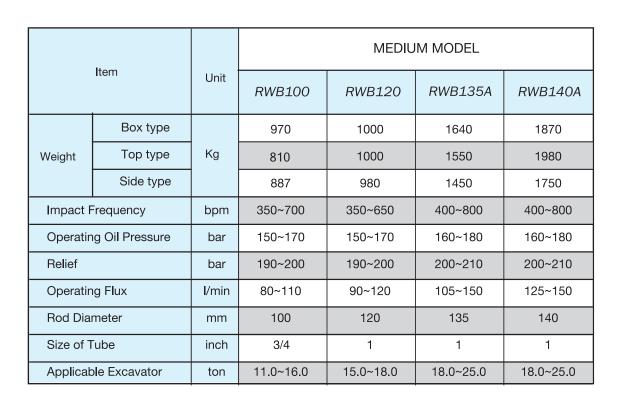



ltem		Unit	HEAVY MODEL					
			RWB155	RWB165	RWB175	RWB190		
Weight	Box type		2930	3130	4479	-		
	Top type	Kg	2900	-	-	-		
	Side type		2730	3350	4120	4500		
Impact Frequency		bpm	250-350	200-350	120-220	180-225		
Operating Oil Pressure		bar	160~180	180~200	200~220	200~230		
Relief		bar	200~220	200~240	240~260	240~270		
Operating Flux		I/min	180-240	200-260	210-290	240-300		
Rod Diameter		mm	155	165	175	189		
Size of Tube		inch	1 1/4	1 1/4	1 1/4	1 1/4		
Applicable Excavator		ton	28.0~35.0	30.0~45.0	40.0~55.0	50.0~65.0		



COMPANY PROFILE



- PRODUCTS High efficiency and outstanding quality
 COOPERATION Pleasant experiences
 SERVICES Rapid, accurate, friendly, non-excuse
 BRAND Globalized with faithful distributors and users in places
 STAFF Focus and never pause on the way to target











- ORGANIZATION Stimulating, brave, calm, unified, efficient, innovating, chasing
 EMOTION Loving, respecting, appreciating, requiting
 PERFORMANCE Let all customers be proud of Nuosen







EFFICIENCY EXTRAORDINARY EXPERT










SINCE 2016, WE HAVE
TAKEN PART IN THE MAIN
INTERNATIONAL MACHINERY EXHIBITION,
OUR BRAND IS ACCEPTED
BY OUR HONORABLE
CUSTOMERS.











SERVICE NETWORK

